

## OROFLEX




### CHARACTERISTICS

Colour: Black.  
 Composition: Synthetic rubber and Polyester-Polyamide textile.  
 Surface: Ribbed for maximum abrasion resistance.  
 Service Temperature: -20 °baC to + 80 °baC  
 Standard Length: 30-60 m (up to 200 m to order).  
 High abrasion resistance.

### APLICACIONES

- Sewage pumps
- Drainage pumps
- Transfers
- Drainage
- Irrigation installations
- Pumping of sludge and liquid fertilizers
- Temporary installations (by-passes)
- Cable and sling protection covers
- Irrigation guns

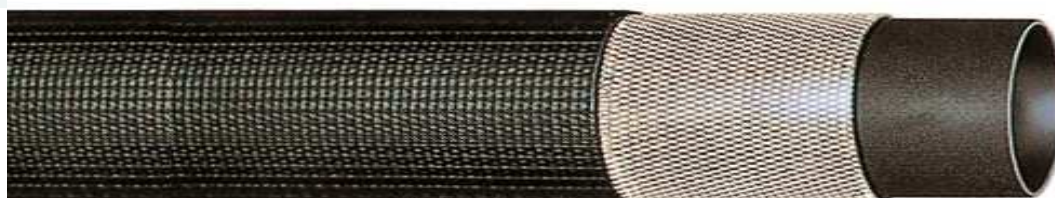

Code	Nominal Diameter		Wall thickness mm	Weight per meter grams	Service/burst pressure bar	Tensile strength Kg	Radius of curvature m
	mm	inches					
01100	30	1 1/4	2	270	10 / 30	700	0,500
01101	38	1 1/2	2	310	10 / 30	900	0,700
01102	45	1 3/4	2	370	10 / 30	1.200	0,900
01103	52	2	2	450	10 / 30	1.300	1,100
01104	60	2 1/4	2	500	10 / 30	1.400	1,200
01105	65	2 1/2	2	620	10 / 30	1.400	1,300
01106	70	2 3/4	2,5	650	10 / 30	1.700	1,350
01107	76	3	2,5	680	10 / 30	1.800	1,450
01108	80	3 1/4	2,5	700	10 / 30	1.850	1,450
01109	90	3 1/2	2,5	830	10 / 30	2.100	1,480
01110	102	4	2,5	950	10 / 30	2.400	1,700
01111	110	-	3	1.100	10 / 30	4.000	1,800
*01112	115	4 1/2	3	1.200	10 / 30	4.100	1.900
01113	127	5	3	1.450	10 / 30	4.200	2,100
01114	152	6	3	1.650	10 / 30	5.000	2,250
01115	204	8	3	2.250	10 / 30	6.600	3,000
01116	254	10	3,5	2.800	8 / 24	8.800	3,300
*01117	306	12	4	3250	8 / 24	10.200	3.600

\* To order